

DS-7R00NI-E4 SERIES NVR



Features and Functions

Video Input and Transmission

- Up to 32-ch ONVIF conformant IP cameras input (max. incoming bandwidth: 160 Mbps)
- Live view of the connected camera at up to 6 MP resolution

Compression and Recording

- H.264+ compression improves encoding efficiency by up to 50% and reduces data storage costs
- Full channel recording at up to 6 MP resolution

Video Output

- HDMI output and VGA output at up to 1920×1080p resolution

Storage and Playback

- Four SATA interfaces (up to 6TB of capacity per HDD)
- Up to 16-ch synchronous playback at 4CIF resolution
- Smart search for efficient playback
- USB 3.0 provides high-speed file transfer and backup

Smart Function

- Supports multiple VCA(Video Content Analytics) events for IP cameras

Network & Ethernet Access


- Hik-Connect for easy network management
- 2 Gigabit Ethernet network interfaces



Specifications

Model		DS-7R08NI-E4	DS-7R16NI-E4	DS-7R32NI-E4
Video/Audio input	IP video input	8-ch	16-ch	32-ch
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)		
Network	Incoming bandwidth	80 Mbps	160 Mbps	160 Mbps
	Outgoing bandwidth	80 Mbps		
	Remote connection	32	128	
Video/Audio output	Recording resolution	6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Frame rate	Main stream: 50 fps (P)/60 fps (N)		
		Sub-stream: 50 fps (P)/60 fps (N)		
	HDMI/VGA output	1-ch, resolution: 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
Audio output	1-ch, RCA (Linear, 1kΩ)			
Decoding	Live view/Playback resolution	6MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Capability	8-ch@720p, 5-ch@1080p	16-ch@4CIF, 12-ch@720p, 6-ch@1080p	
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS		
Hard disk	SATA	4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4 HDDs		
	eSATA (Optional)	1 eSATA interface		
	Capacity	Up to 6TB capacity for each HDD		
External interface	Network interface	2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces		
	Serial interface	RS-232 and RS-485		
	USB interface	2 × USB 2.0 and 1 × USB 3.0		
	Alarm in/out	16/4 (optionally can be expanded to 16/8)		
General	Power supply	100 to 240 VAC		
	Consumption (without hard disk or DVD-R/W)	≤ 20 W	≤ 20 W	≤ 20 W
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)		
	Working humidity	10 % to 90 %		
	Chassis	19-inch rack-mounted 1.5U chassis		
	Dimensions (W × D × H)	445 × 400 × 71 mm (17.5" × 15.7" × 2.8")		
	Weight (without hard disk or DVD-R/W)	≤ 4 kg (8.82 lb)		

Physical Interfaces

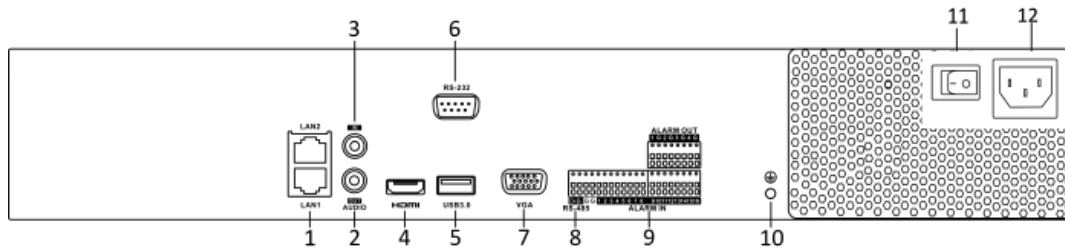

Index	Description	Index	Description
1	LAN1 and LAN2 Network Interfaces	7	VGA Interface
2	AUDIO OUT	8	RS-485 Serial Interface
3	AUDIO IN	9	ALARM IN and ALARM OUT
4	HDMI Interface	10	GND
5	USB 3.0 Interface	11	100 to 240VAC Power Input
6	RS-232 Serial Interface	12	Power Switch

Available Models

DS-7R08NI-E4, DS-7R16NI-E4 and DS-7R32NI-E4

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com